


EXIMO

+

OTIS


HEAVY DUTY DIESEL & OIL CLEANING INSTRUCTIONS

OTIS PRETREAT

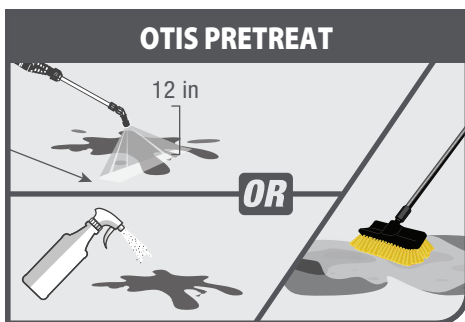

HEAVY DUTY SOLUTION (2 gal)

1

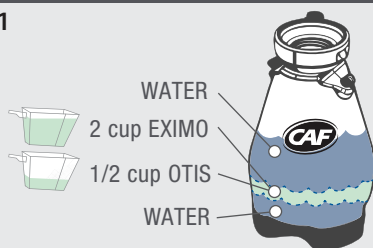

EFFECTIVE ON

- Concrete
- Parking lots
- Driveways
- Drive thrus
- Forecourts
- Sidewalks
- Pavers
- Fuel Islands

FREQUENCY

Pretreat: Every four (4) weeks or as needed

Heavy Duty Cleaning Process:

1-2 times per week

TASK DURATION

Pretreat: 2-3 minutes

Heavy Duty Cleaning Process: 30 seconds

TIPS

Continuously agitate 2 gal sprayer to prevent clogging

2

AGITATE SPRAYER
FREQUENTLY TO
PREVENT CLOGGING



3

REAPPLY EXIMO + OTIS 1-2
TIMES PER WEEK. PRETREAT
EVERY FOUR (4) WEEKS
OR AS NEEDED



STAIN REMOVED

OTIS PRETREAT

Fill container half full with water. Use the chart provided to add OTIS and remaining water to container. Agitate to mix.

OTIS PRETREAT

32 fl oz Spray Bottle

2 gal Sprayer

OTIS

3 Scoops

1/2 cup

Apply OTIS and allow 30 seconds for solution to soak into stain, then scrub in a back-and-forth motion using a deck brush or broom. Repeat OTIS pretreat every four (4) weeks, or as needed.

HEAVY DUTY CLEANING PROCESS

1. Add 1/2 gal of water to a 2 gal sprayer container. Using EXIMO scoop provided, add 1 cup of EXIMO and 1/4 cup of OTIS per 1 gal of water. Add remaining water and agitate.

HEAVY DUTY SOLUTION	1 gal	2 gal
OTIS	1/4 cup	1/2 cup
EXIMO	1 cup	2 cups

2. Keep sprayer 12 inches from surface and begin applying the EXIMO + OTIS mixture on the surface using even strides as you walk. Agitate sprayer often to avoid product settlement and reduce clogging.

3. Apply 1-2 times weekly.



HAVE QUESTIONS? NEED TRAINING?
WE'RE HERE TO HELP!



Visit www.mycaf.com for additional product information, SDS, training materials, product videos and more.



www.mycaf.com | (888) 737-0025

Copyright © 2022 CAF, INC. All Rights Reserved. 202207070082