



+



FREQUENTLY ASKED QUESTIONS

How often should the Heavy Diesel process be used?

OTIS Pretreat: Every four (4) weeks or as needed. Heavy Duty Cleaning Solution: 1-2 times per week.

How much Heavy Diesel solution should be applied per application?

Heavy Duty Diesel solution can vary depending on the cement's surface texture, with rougher surfaces requiring more solution. On average 1-gallon of solution will cover 250 sq.ft.

What preparations are needed before starting the Heavy Diesel Cleaning process?

Clear away any debris and dispose of any trash. After Otis pretreat it is not necessary to wait for surface to dry before proceeding with Heavy Duty Diesel solution application. Please follow all company and product safety procedures during use.

Do I have to block off the entire facility when using the heavy Diesel Process?


No – only section off the work area necessary to ensure personnel safety. After the application, the area is ready for use. You can treat one section at a time while leaving other areas open for business.

How do I know when I'm finished applying the Heavy Duty Diesel and Oil solution?

Application is complete when the product has been evenly spread out over desired area. If any area didn't receive enough solution, simply apply more where necessary.

When do I use the OTIS pretreat for the Heavy Duty Diesel and Oil process?

Perform the OTIS pretreat as your initial step in removing any diesel stains. After initial

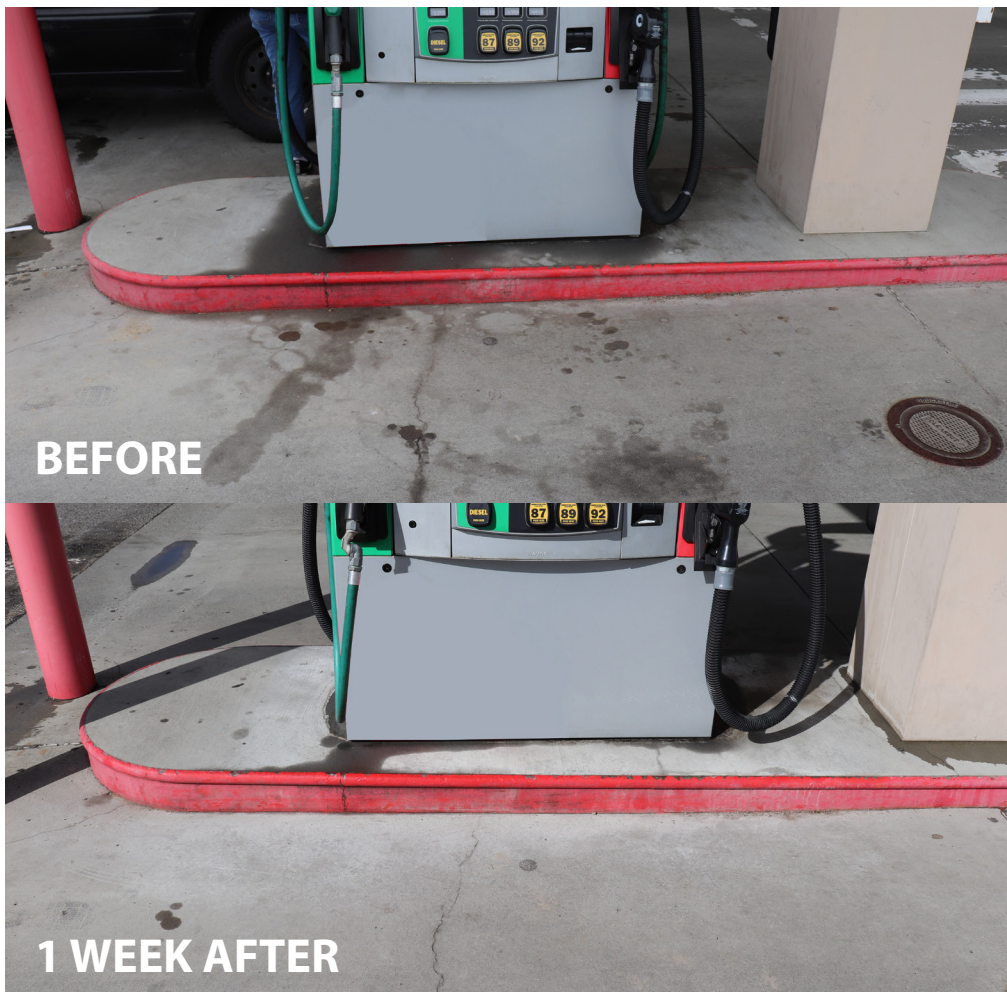

application reapply every four (4) weeks, or as needed. The OTIS pretreat is a fast effective way to cut through diesel build up and will help you achieve your "clean" goals sooner.

How is the Heavy Diesel Process better than pressure washing my location?

Unlike pressure washing, the Heavy Duty Diesel and Oil process is environmentally safe and does not violate environmental regulations.

Application does not require closing off the entire business and can still serve customers. Using EXIMO and the Heavy Duty Diesel and Oil solution can save you up to 75% over pressure washing.

What are some other areas I can use the Heavy Duty Diesel and Oil process?

The Heavy Duty Diesel and Oil process can also be used on gasoline stains or concrete surfaces around receptacles stained by food prep grease.

Note: EXIMO breaks down hydrocarbon chains within the petroleum stains on the surface, and deep inside the pores of the concrete, restoring the surface to its original appearance.



**HAVE QUESTIONS? NEED TRAINING?
WE'RE HERE TO HELP!**



Visit www.mycaf.com for additional product information, SDS, training materials, product videos and more.

