



RUST STAIN REMOVER INSTRUCTIONS


Sprayer Instructions

1




Clean and sweep area clear of debris

2

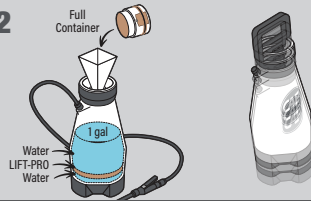


Mix full container of LIFT-PRO

3

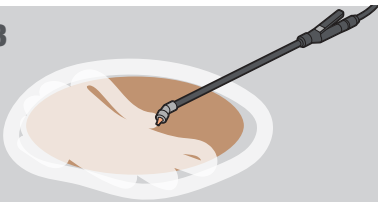

Apply directly to rust stains

4

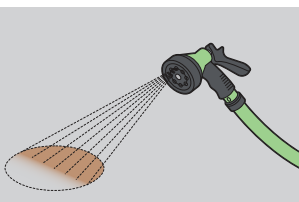

Wait 10 min before rinsing off rust stains

EFFECTIVE ON

- Concrete
- Asphalt
- Parking lots
- Sidewalks
- Driveways
- Pavers
- Forecourts
- Fueling stations
- Drive Thrus

FREQUENCY

- As Needed

TASK DURATION 🕒

15 - 20 minutes

TIPS

It is a good practice to rinse out the 2 gallon sprayer shortly after use. After application, fill the sprayer with water and use to rinse off rust stain and LIFT-PRO.

For thick rust stain buildups, use stiff bristle, wire brush, or deck brush to scrub LIFT-PRO on surface after application and before rinsing.

PREPARATION

1. Clean and remove any grease, oil, dirt or debris from rust-stained areas.
2. Add a small amount of water to sprayer. Add 1 full container of LIFT-PRO per gallon. Agitate to mix until all concentrate is dissolved, and solution thickens after about a minute.

APPLICATION

3. Promptly apply around the perimeter of the rust stain, then cover stain using back and forth motion until the entire stain is covered. Allow formula to work for at least 10 minutes.
4. Using a hose or bucket of water, rinse off LIFT-PRO.




SAFETY: Avoid contact with eyes. Remove and rinse any clothing come into contact with LIFT-PRO. Wash off skin that has come into contact with LIFT-PRO. Mix in a well-ventilated area and avoid breathing in concentrate dust.



**HAVE QUESTIONS? NEED TRAINING?
WE'RE HERE TO HELP!**



Visit www.mycaf.com for additional product information, SDS, training materials, product videos and more.



www.mycaf.com | (888) 737-0025

COPYRIGHT © 2024 CAF, INC. ALL RIGHTS RESERVED. 2024072388