

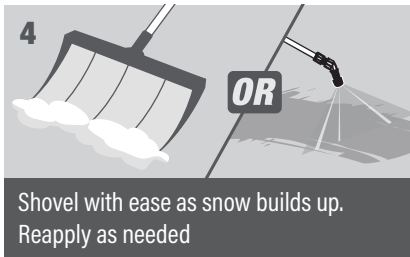


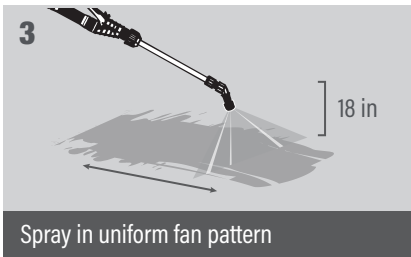

LIQUID DE-ICER AND PRETREAT INSTRUCTIONS

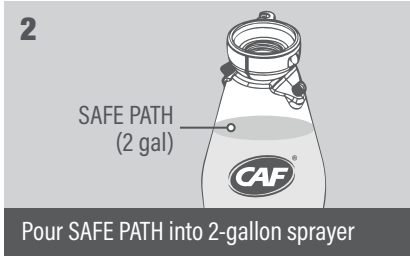

EFFECTIVE ON

- Fueling Stations
- Drive Thru Lanes
- Asphalt
- Parking Lots
- Forecourts
- Pavers
- Sidewalks
- Driveways
- Sump Covers

FREQUENCY

- Apply before snow accumulation for best results.
- Apply as needed depending on severity of snow accumulation. Reapply when snow begins to bond to surface.

TASK DURATION

2 minutes per 1000 sqft.

TIPS

- Apply directly to concrete cracks to prevent freeze / thaw damage.
- Pretreat most effective on dry or frozen surfaces.
- While SAFE PATH increases friction on ground surfaces, certain smooth iced surfaces can be slippery as SAFE PATH is actively melting.
- Most effective below freezing temperatures.

PREPARATION

1. For existing snow buildup, shovel or plow first.

TO USE

2. Solution is ready to use. No mixing required. Add solution directly into a clean 2-gallon sprayer.

TO APPLY

3. Keep sprayer 18 in. from the surface as you apply SAFE PATH. As you walk, use a steady motion with sprayer wand across untreated area to ensure even coverage.

4. Reapply when new accumulation begins to bond to surface.

PRETREAT	UP TO 3/8" ICE
1/2 gal	1 gal
1,000 sq ft	1,000 sq ft



NOTE: The most cost-effective way to utilize SAFE PATH is through pre-treating which prevents frozen precipitation from sticking to walkways.

HAVE QUESTIONS? NEED TRAINING? WE'RE HERE TO HELP!

Visit www.mycaf.com for additional product information, SDS, training materials, product videos and more.

DE-ICER AND PRETREAT	
2.0 GAL (7.6 L)	COVERS 4,000 SQ FT



www.mycaf.com | (888) 737-0025